



Disassembling Midland X-tra Talk Radio LXT118 Case

This is a prerequisite only! This explains how to remove back case.

Written By: James Tucker Dunn



INTRODUCTION

After the batteries are removed the case can be disassembled.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Batteries



- First, apply pressure with your thumb on the top of the battery cover.

Step 2




- Next, pull down on the cover until it begins to slide.

Step 3




- Finally, once the cover is completely off, pry up the old batteries with your finger or a strong, skinny tool (i.e. spudger).

Step 4 — Case

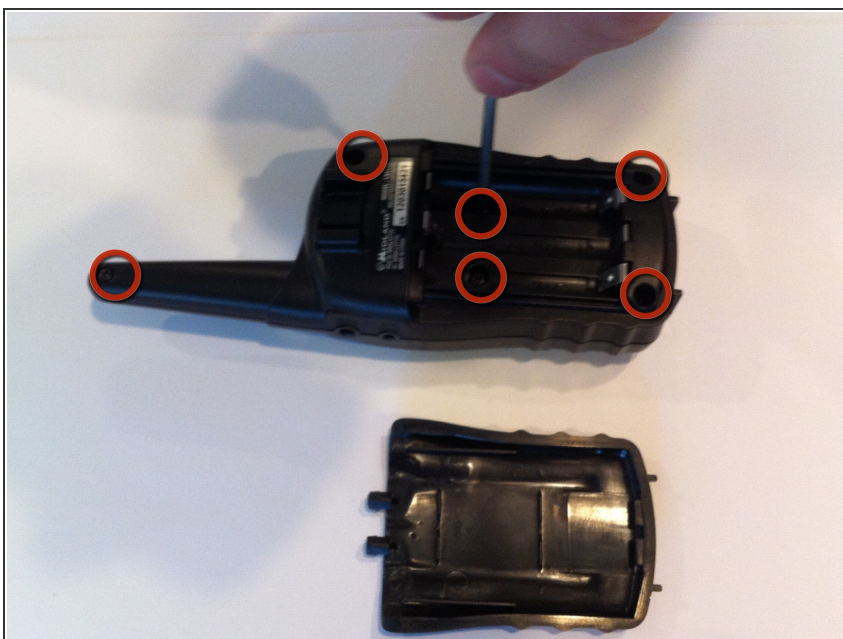

- Unscrew the six 8.0 millimeter long, #0 screws on the backside of the case using the Phillips #0 screwdriver.

Step 5

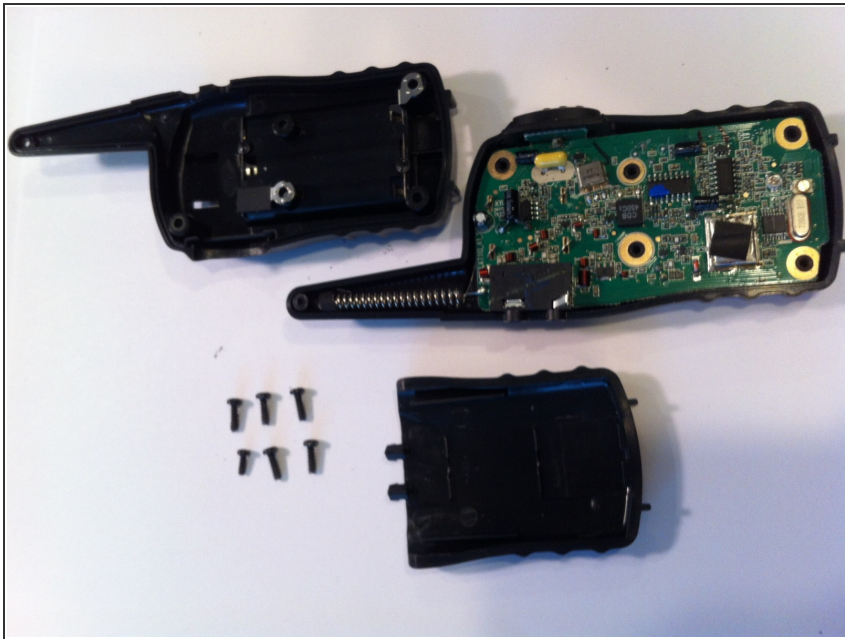

- Detach back part of the case by gently lifting up.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 09:01:56 PM.